

## Managed Switch

# SRX-10GS24PX-L3



### Power

Power supply	Mains on load
Voltage range	AC 100~240V 50/60Hz
Consumption	Redundance Power 2*60W

### Network Connector

Ethernet Port	1~24 ports: 10/100/1000Mbps RJ45 Auto-MDI/MDI-X ports Uplink: 10GBase-X SFP+ Module ports support 1000Base-X, setup the "ports settings" on Web management
Transmission distance	Ethernet ports: 100m SFP ports: depend on SFP module

### Network Switch

Network standard	IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3X, IEEE802.1Q, IEEE802.1p, IEEE802.3ad, IEEE802.3ae
Switch capacity	128Gbps
Packet Buffer	12Mb
Packet Forwarding Rate	95.2Mpps
MAC Address	16K

### Management

Management	Management L3
------------	---------------

### Protection

ESD	6KV/8KV Per: IEC61000-4-2
Lighting Protection	6KV Per: IEC61000-4-5


### Environmental

Working temperature	-10 °C ~ +45 °C
Storage temperature	-40 °C ~ +85 °C
Humidity (non condensing)	0~95%

### Mechanical

Dimension(L*W*H)	442mmx315mmx44mm
Material	Sheet Metal
Color	Black
Weight	4.5 kg

## 24 Gigabit Ports & 4\*10 Gigabit Managed Ethernet Switch

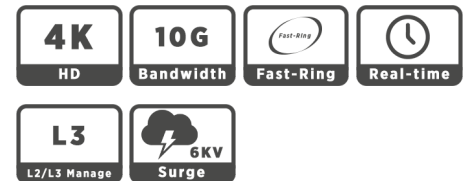


### Description

The 24 Gigabit ports managed Ethernet switch, which provide 24\* Gigabit downlink Ethernet ports, 4\* 10 Gigabit uplink SFP ports. The Products support IEEE 802.3 af/at, support Web layer-3 network management and. Products are widely used in security surveillance, network engineering projects and so on.

### Features

- \* Provide 24\* Gigabit downlink Ethernet ports, 4\* 10Gigabit uplink SFP ports;
- \* Provide web-based layer 3 network management
- \* Support high-speed data forwarding, very suitable for large flow of video data forwarding in security surveillance;
- \* Support recovery of IP address & user password by one key recovery button?
- \* Quick Installation, simple operation, convenient for wall/desk/rack installation.

### The front panel

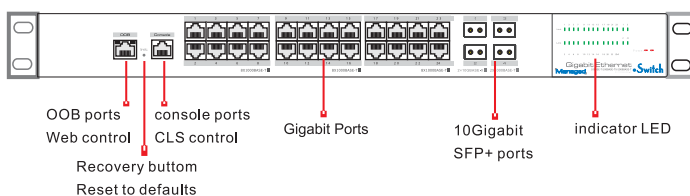

### The back panel

